

The manual of the devices SEL OMNI TOWER

1. Place the device on the conference table or desk The recommended distance from the person whose recording device will be jammed 0.5 to 3 meters.

Please remember that on the effectiveness of the work of the device has influence: the way of the location device and the forces of the intensity of the voice of the protected person - the voice weaker and quiet = the better effectiveness.




2. The switching on-of the device - (the main on-switch).



a) Press the switch. The switch will becomes illuminated - the device will be ready for operation.

b) the device is powered on and off by pressing the green button on the remote control
turning on the device signals double flashing of the red diode in the signal line,
turning off the power supply - the red LED flash once

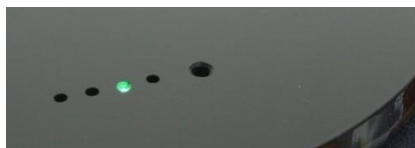

3. Diodes signaling the state of charging an accumulator.

4. The socket of the charging of the device.



The charging a battery.

After connecting the AC adapter to the device, the charging process begins. The following LEDs will light up in the line:

- LED red flashing - meaning completely discharged accumulator
- LED yellow - fragmentarily charged an accumulator
- LED green – the accumulator charge
- LED blue flashing – the final phase of the charging

The accumulator fully charged when all diodes will fade LED. The time of the charging battery about 5 hours

The state of charging an accumulator:

- The lighting green diode LED – the battery loaded, the energy will be enough for about 3 working hours
- The lighting yellow diode LED – the energy it stayed on about 1 hour of the work.
- The flashing red diode LED – the battery discharged, immediately to connect the AC adapter.

5. Conditions of the safety:

- a) do not open the device, breaking the seals involves immediate loss of the warranty.
- b) do not approach the device while working at a distance of less than 0.5 meters.
- d) during the work next door to device should not be found animals.

6. Features:

- proprietary algorithm for generating digital jamming of the ultrasonic signal.
- remote radio on - switching off using the remote control
- quiet operation - no audible and bothersome sound
- battery charge indicator and status indicator.
- the simple services and the exploitation.

7. Specifications:

- range: depending on the eavesdropping one ought to accept the area about 30-40 m²
- directivity of the work of the device in the ground plane 360 °
in the vertical plane 105 °
- control by means of a wireless remote control - switching on and off, working range about 20 meters.
- wireless remote control: operating frequency 433.92 MHz in the ISM band
- power supplies: the built-in internal accumulator and the power supply 110-230V
- **maximum continuous operating time 3 hours, break time 30 minutes.**
- work times from the built-in accumulator about 3 hours
- time of the battery charging 5 hours
- weight: 5 kg, range of work in the temperature from 0 ° to + 40 ° C (32-104 Fahrenheit)
- size : height 37 cm., diameter 16 cm.

DUE TO TECHNOLOGICAL LIMITATIONS, SOME RECORDER DEVICES CAN NOT BE SUPPRESSED, WHICH IS NOT A MALFUNCTION OF “SEL OMNI TOWER”.

WARRANTY OBLIGATIONS

Warranty period - 12 months from the date of sale.

In case of failure of the device during the warranty period, the owner has the right to warranty repairs. In case of violation of seals, mechanical damage to the case or controls, the right to warranty is lost, and repairs are carried out at the expense of the owner.